

1480 1/8 DIN Panel Indicator



Features

- Universal Input (Strain Gauge, Voltage, Current, Thermocouple or RTD)
- Min/max Value Hold
- 2 Alarm Outputs
- Retransmission

Description

The 1480 is a Universal Pressure or Temperature Input Indicator with single or dual configurable alarms, as well as optional linear retransmission of displayed Process Variable. Ideal for use in Extrusion applications.

Specifications

PERFORMANCE CHARACTERISTICS

Output Configuration	1 or 2 relay outputs, with optional linear retransmission
Alarms	2 process high / low with adjustable hysteresis
Viewable Values	Process variable, maximum value, minimum value
Legends	°C/°F LED
Human Interface	3 button operation, 4 digit 13mm high display red, (color change on alarm), plus 1 set-up, 2 alarm indicator
Input Thermocouple	J, K, C, R, S, T, B, L, N
RTD	3 Wire PT100, 50Ω per lead maximum (balanced)
Strain Gauge	350 Ohm Strain Gage
Bridge Connection:	4 or 6 wire (6 to use internal shunt cal switch)
Bridge Excitation:	10V ±7%
Bridge Sensitivity:	1.4 to 4 mV/V
Input Signal Span:	- 25% to +125% of full scale (approximately -10 mV to +50 mV) Calibration switch between CAL2 & CAL1 terminals
Shunt Value:	From 40% to 100%
Display Scaleable	-1999 to 9999, with adjustable decimal point
DC Linear	0 to 20mA, 4 to 20mA, 0-50mV, 10-50mV, 0 to 5V, 1 to 5V, 0 to 10V, 2 to 10V Note: 24V external power supply required
Input Impedance	>10MΩ for thermocouple and mV ranges, 47KΩ for V ranges and 5Ω for mA ranges
Accuracy	±0.1% of input range ±1 LSD (T/C CJC better than 1°C)
Sampling	4 per second, 14 bit resolution approximately (250ms sample time)

PERFORMANCE CHARACTERISTICS (continued)


Sensor Break Detection	<2 seconds (except zero based DC ranges), high alarms activate for T/C RTD, mV ranges, low alarms activate for mA or V ranges
Strain Gauge Sensor	Set to either high or low alarm.
OUTPUTS & OPTIONS	
Alarm Relays	Contacts Single Relay SPDT 2 Amp resistive at 240V AC, >500,000 operations. Latching or non-latching. Relay SPST 2 Amp resistive at 240V >200,000 operations. Reinforced safety isolation from inputs and other outputs
DC LINEAR RETRANSMIT	
Outputs	0 to 20mA, 4 to 20mA into 500Ω max, 0 to 10V, 2 to 10V, 0 to 5V into 500Ω min. Accuracy ±0.25% at 250Ω (degrades linearly to 0.5% for increasing burden to specified limits)
Logic Input	External reset of latched relay, stored alarm 1 elapsed time, stored min/max PV values or initiate tare function. Action occurs on high (3 to 5VDC) to low <0.8VDC, or Open to Closed transition

OPERATING & ENVIRONMENTAL


Temperature & RH	0 to 55°C (-20 to 80°C storage), 20% to 95% RH non-condensing
Power Supply	100 to 240V ±10% (90 to 264V) 50/60Hz 7.5VA (optional 20 to 48V AC 7.5VA/22 to 65V DC 5 watts)
Front Panel Protection Standards	IEC IP66 (Behind panel protection is IP20) CE. Pollution Degree 2, Installation Category II




Ordering Guide

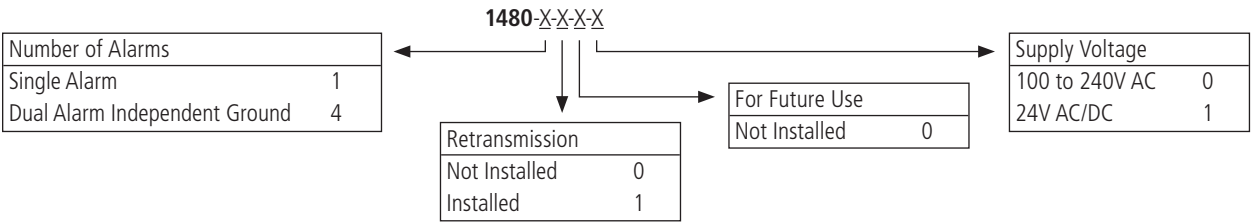

DIMENSIONS

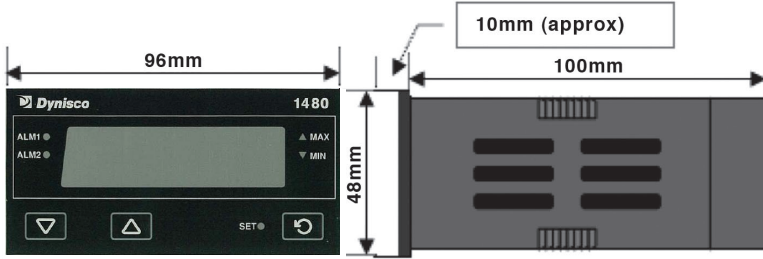

CUTOUT

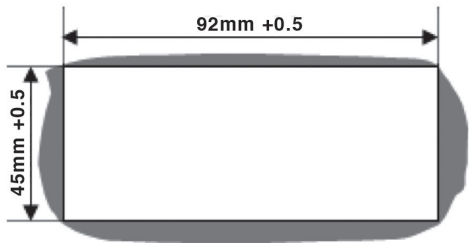

WIRING LABEL/REAR TERMINALS

