

# Capsule Pressure Gauges

## Test Gauge Series, Class 0.6

### Model 610.20, Standard Series

### Model 630.20, Stainless Steel Series

WIKA Data Sheet PM 06.09



#### Applications

- ✓ ♣♣ Precision measurement in laboratories
- ✓ ♣ High-accuracy pressure measurement
- ✓ ♣ For gaseous, dry and non-aggressive media
- ✓ Model 630.20 also for aggressive media

#### Special Features

- ✓ Zero adjustment in front
- ✓ Special connection location on request
- ✓ Low scale ranges from 0 ... 10 mbar



**Capsule Pressure Gauge Model 610.20**

## Description

#### Design

EN 837-3

#### Nominal size in mm

160

#### Accuracy class

0.6

#### Scale ranges

0 ... 10 mbar to 0 ... 600 mbar  
or all other equivalent vacuum or combined pressure and vacuum ranges

#### Pressure limitation

Steady: full scale value  
Fluctuating: 0.9 x full scale value

#### Operating temperature

Ambient: -20 ... +60 °C  
Medium: +60 °C maximum

#### Temperature effect

When the temperature of the measuring system deviates from the reference temperature (+20 °C):  
max.  $\pm 0.6\%$  /10 K of full scale value

#### Ingress protection

IP 54 per EN 60 529 / IEC 529

## Standard version

### Process connection

Model 610.20: Cu-alloy  
 Model 630.20: stainless steel  
 lower mount (LM) or lower back mount (LBM)  
 G ½ B (male), 22 mm flats

### Pressure element

Double capsule, stainless steel

### Movement

Cu-alloy, with ball bearing

### Dial

Aluminium, white, black lettering

### Pointer

Knife edge pointer, aluminium, black

### Zero adjustment

In front

### Case

Stainless steel

### Window

Clear non-splintering plastic

### Bezel ring

Cam ring (bayonet type), stainless steel

## Options

- ✓ Other process connection
- ✓ Movement stainless steel, with ball bearing
- ✓ ♣ Overpressure or vacuum safety at  
 scale ranges > 25 mbar: 10 x full scale value  
 scale ranges ≤ ♣ 25 mbar: 3 x full scale value


## Further options

- ✓ ♣ Panel or surface mounting flange, stainless steel
- ✓ ♣ Triangular bezel, stainless steel, with clamp
- ✓ ♣ Instrument glass or laminated safety glass window
- ✓ Bayonet lock bezel with lead seal


## Dimensions in mm

### Standard version

#### Lower mount (LM)

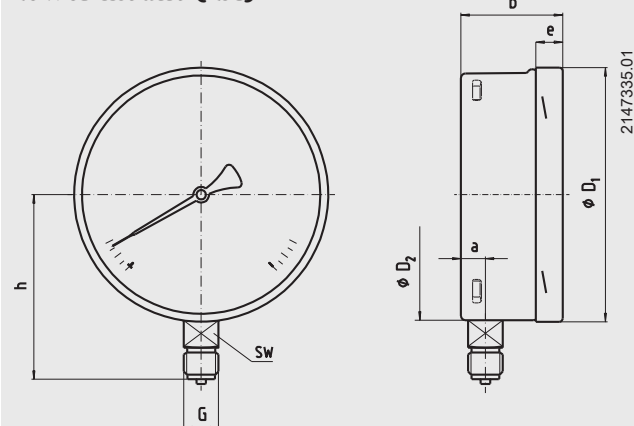

#### Lower back mount (LBM)

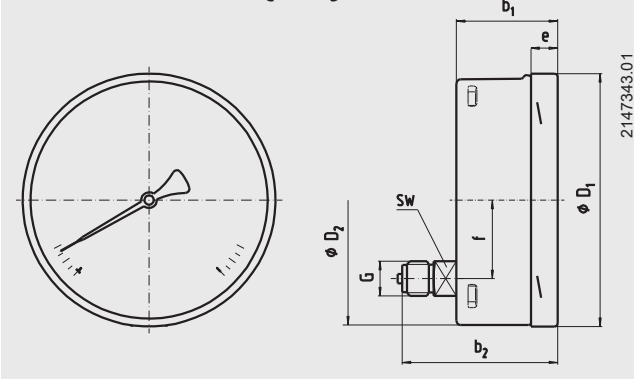

NS	Dimensions in mm											Weight in kg
	a	b	b <sub>1</sub>	b <sub>2</sub>	D <sub>1</sub>	D <sub>2</sub>	e	f	G	h ± 1	SW	
160	15.5	65.5	65.5	99	161	159	17.5	50	G ½ B	118	22	1.2

Process connection per EN 837-3 / 7.3

## Ordering information

Model / Nominal size / Scale range / Connection size / Connection location / Options

Modifications may take place and materials specified may be replaced by others without prior notice.  
 Specifications and dimensions given in this leaflet represent the state of engineering at the time of printing.