

DYNISCO MODEL 1192

Smart Pressure Transmitter for Thread Mounting



Description

Dynisco's IPX II Series 1192 is a high performance, microprocessor based transmitter with ambient and sensor temperature compensation, featuring a thin film sensor and proprietary fabrication techniques. The Model 1192 provides the highest accuracy pressure measurement available in a 1/2 - 20 UNF mounting. Ranging and setup of the transmitter may be accomplished with a dual LCD display, the Windows™ based Smartlink software or by using a HART® communicator.

Features

- Accuracy of $\pm 0.15\%$ of range compensated for temperature (range specific)
- Temperature compensation
- 4 to 20 mA, 2 - wire output
- 6:1 span turn - down capability
- Split design
- Optional second 4 to 20 mA signal for temperature
- Optional programmable LCD display
- HART digital communication
- FM approved models
- Intrinsically safe models

Benefits

- Improves process optimization and removes temperature effects
- Improves accuracy
- Process industry standard
- Allows use in multiple ranges
- Easy to install
- Output temperature signal to display system
- At line readout of pressure or temperature
- Process industry standard
- Approved for operation in hazardous areas
- Approved for EEx ia IIC



Specifications



Performance Characteristics

Ranges:

psi: 0 - 1,500, 0 - 3,000, 0 - 5,000, 0 - 7,500, 0 - 10,000

bar: 0 - 100, 0 - 200, 0 - 350, 0 - 500, 0 - 680

Accuracy 0 to 3000 psi and above:

$\pm 0.15\%$ of full scale range: Within 20% to 100% of range and within process temperatures of 77°F to 575°F (25°C to 300°C) ($\pm 0.25\%$ for 1500 psi range)

$\pm 0.25\%$ of full scale range: Within 0% to 20% of range and within process temperatures of 77°F to 575°F (25°C to 300°C) ($\pm 0.50\%$ for 1500 psi range)

Hastelloy:

$\pm 0.30\%$ of full scale range: Within 20% to 100% of range and within process temperatures of 77°F to 575°F (25°C to 300°C) ($\pm 0.25\%$ for 1500 psi range)

$\pm 0.50\%$ of full scale range: Within 0% to 20% of range and within process temperatures of 77°F to 575°F (25°C to 300°C) ($\pm 1.00\%$ for 1500 psi range)

Temperature Characteristics

Operating temperature ranges (compensated):

Process: 77°F to 575°F (25°C to 300°C) optional to 660°F (350°C)

Electronics: 77°F to 176°F (25°C to 80°C)

Electrical Characteristics

Output: 2 - wire, 4 to 20 mA. Hart digital communication superimposed on the 4 to 20 mA signal is available for remote configurations.

Damping: 0 to 32 second time constant, adjustable through HART communicator or SmartLink Software.

Power supply: 12 to 42 Vdc for non intrinsically safe; 12 to 30 Vdc for intrinsically safe.

LCD Display

Allows transducer to be configured and ranged at line before or after installation. Displays process pressure, 0 - 100% bar graph and temperature (optional).

Approvals

CE approved

FM approved, Explosion - Proof, Class I, Division I, Groups B, C and D,

Class II/III, Division 2, Groups E, F and G (optional),

SIRA approved, Intrinsically Safe, EEx ia IIC (optional)

Resolution: 0.035% full scale or better

Zero span and adjustment: Zero: +84% of range; Span: 16% to 100% of range

Turn-down: 6:1

Overpressure limit: 1.5 x range

Sample rate: >10/sec


Long term stability: <0.09% of full scale per year

Temperature effects:

Electronics: $\pm 0.15\%$ span/99°F ($\pm 0.15\%$ span/55°C)

Electronics housing: IP66, NEMA 4x


Load limitation: Maximum loop resistance is determined by the voltage of the external power supply. Digital communication requires a minimum loop resistance of 250 Ohms. (See below)

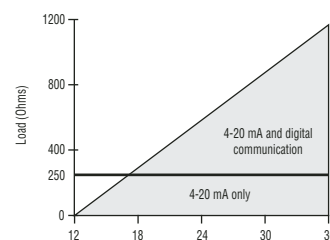

(Shown for standard unit without LCD display)

DYNISCO MODEL 1192

Smart Pressure Transmitter for Thread Mounting

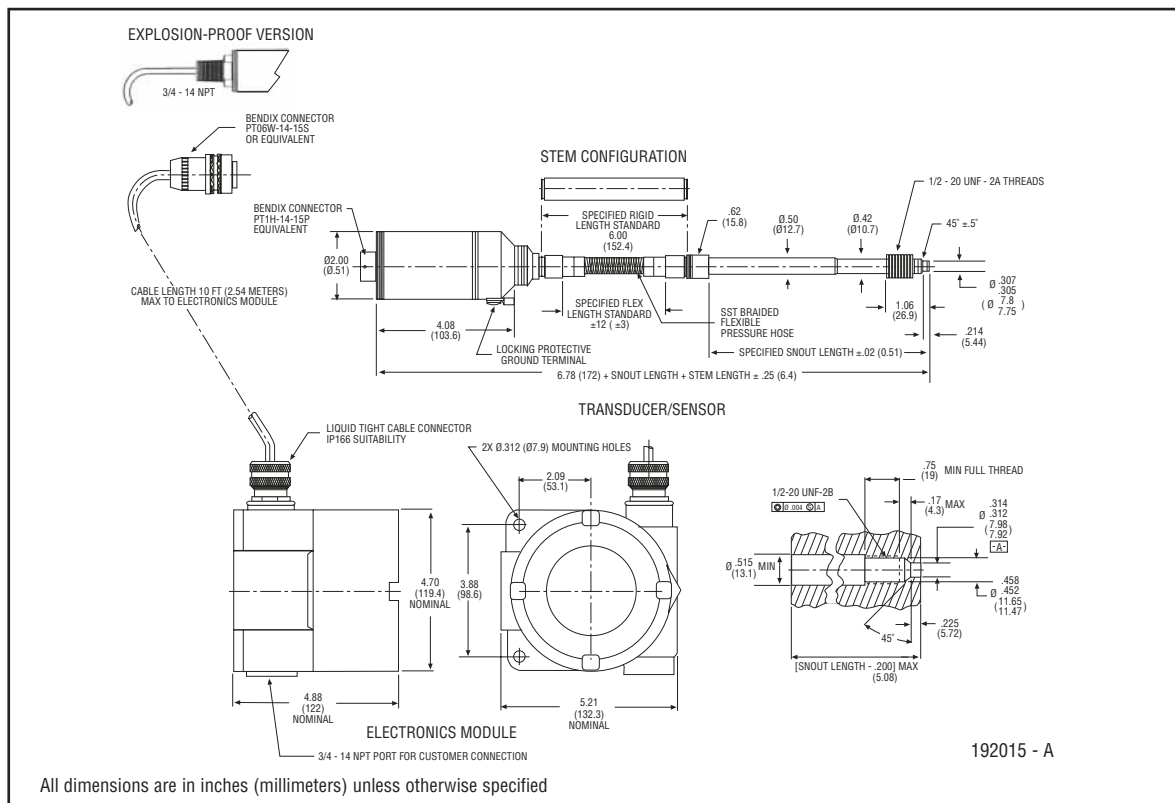

Ordering Guide

Model	Diaphragm Material			Pressure Range				Standard Snout Lengths	
	Code	Description	Code	psi	Code	bar	Code	Length	
N1192: No Approvals S1192: Intrinsically Safe EE x ia IIC E1192: Explosion-Proof Class 1, Division 1, Groups B, C and D Class II/III, Division 2, Groups E, F and G	(Blank)	15-5 PH SST	1.5M	0 - 1,500	1CB	0 - 100	6	6" (152)	
		with	3M	0 - 3,000	2CB	0 - 200	9	9" (229)	
		Dymax®	5M	0 - 5,000	3.5CB	0 - 350	12	12" (305)	
		coated	7.5M	0 - 7,500	5CB	0 - 500	15	15" (381)	
		diaphragm	10M	0 - 10,000	6.8CB	0 - 680	For non-standard lengths please consult factory.		
	H	Hastelloy							

Standard Stem (Capillary) Lengths		Temperature Output		LCD Display		Communication Protocol		Options		Cable Length	
Code	Length	Code	Description	Code	Description	Code	Description	Code	Description	Code	Description
0	0" (0)	(Blank)	No second	(Blank)	No display	H	HART	M625	Full snout	(Blank)	120" (3048)
18	18" (457)		4-20mA output	D2	Programmable		configurable		temperature	L72	72" (1829)
30	30" (762)	T	Second		pressure and				compensated		
			4-20mA output		temperature				to 660°F		
					display				(350°C)		
For non-standard lengths please consult factory										CE and intrinsically	
Note: Max. "snout & capillary" lengths is 36" (914)										safe models are supplied	
										with 72" (1824) of cable.	

All dimensions are in inches (millimeters) unless otherwise specified.

Ordering Example: E1192H - 3M - 6/18 - D2 - H

- Notes:**
- Please consult factory for alternate full scale settings and non-standard options.
 - 10M units are compensated to 7.5M and extrapolated from 7.5M to 10M.
 - Mounting bracket P/N 190750 is recommended.

