


Hydraulic // 0...1400 bar

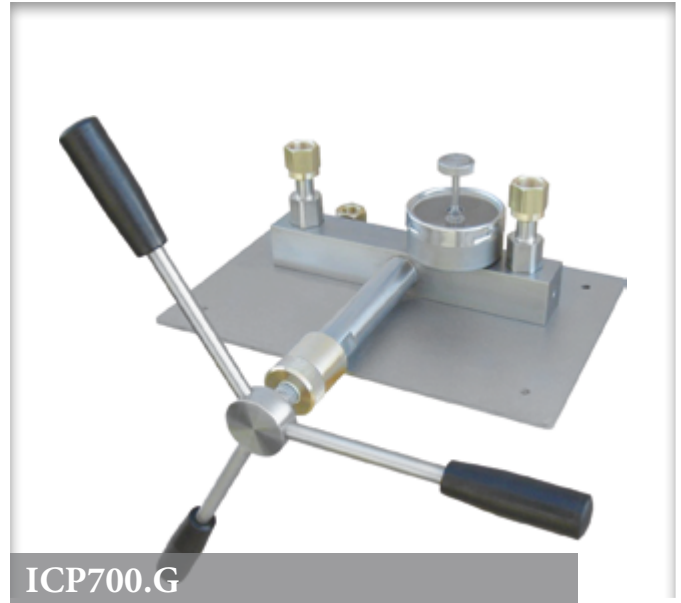

Your advantages

Type	ICP700.T	ICP700.G2 / ICP700.G
	<ul style="list-style-type: none"> • Simultaneous calibration of several test samples thanks to large tank volume • Fast pressure generation with low effort 	<ul style="list-style-type: none"> • Oil-free pressure generation up to 1000 bar • Simple and fast pressure generation with smooth-running spindle

Technical data

Type	ICP700.T	ICP700.G2	ICP700.G
Version	Lever pump	Spindle pump	
Pressure range	0...700 bar	0...700 bar	0...700 bar
Pressure medium	Hydraulic oil		Demineralized water
Connections			
Reference pressure gauge	G $\frac{1}{4}$	G $\frac{3}{8}$ left, G $\frac{1}{4}$, G $\frac{1}{2}$	
Test sample	G $\frac{1}{4}$ with quick coupling and pressure hose (1 m)	G $\frac{3}{8}$ left, G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{8}$	
Basic			
Dimensions	Approx. 500 x 110 x 160 mm	Approx. 340 x 225 x 130 mm	
Weight	Approx. 5.6 kg	Approx. 9.9 kg	
Solid			
Dimensions (case)	Approx. 575 x 470 x 230 mm	Approx. 450 x 370 x 150 mm	
Weight	Approx. 10.2 kg	Approx. 12.6 kg	
+ Adapter kit	Stainless steel, G $\frac{1}{8}$, G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{2}$, $\frac{1}{8}$ NPT, $\frac{1}{4}$ NPT, $\frac{1}{2}$ NPT, M12 x 1.5, M20 x 1.5, G $\frac{1}{8}$, G $\frac{1}{4}$		
+ Seal kit	PA flat gaskets and O-rings		

Order code			
Type	Version		Order number
ICP700T	Lever pump	Basic	EPPT700E000020
		Solid (incl. case and adapter)	EPPT7000000020
ICP700.G2	Spindle pump	Basic	E8PG700E000020
		Solid (incl. case and adapter)	E8PG7000000020
ICP700.G		Basic	E8PG700E000010
		Solid (incl. case and adapter)	E8PG7000000010